

INDUSTRIAL TYPE - **SIMPLE** AIR CURTAINS

133 mm cross flow fan




K - 28



For use in :

- **Large Industrial Spaces**
- **Storage Plants**
- **Storage Areas**
- **Airports**
- **Cold Rooms**

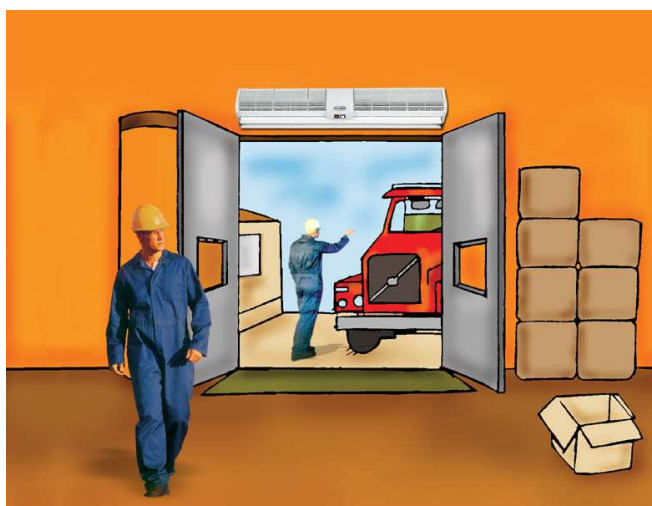

INDUSTRIAL TYPE - **SIMPLE** AIR CURTAINS

133 mm cross flow fan




Air Curtain K – 28 is capable of covering openings of 2.00 m long

Technical Details


Max Door Height (m)	6.00
Max Door Width (m)	2.00
Outlet Velocity (m/sec)	14/12
Air Volume (m ³ /h)	5580/5280
Motor Power (W)	660
Capacitor (μF)	12
Motor Speed (rpm)	1370/1100
Power Supply	230V, 1N, 50Hz
Noise level in 1 m (dB)	68 / 65

AIR VELOCITY DISTRIBUTION CHART

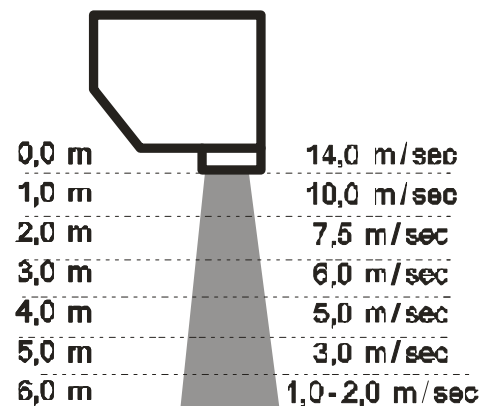

Dimensions

A: Total Length	2100±2 (mm)
B: Total Width	231 (mm)
C: Height	227 (mm)
D: Outlet Length	2040 (mm)
E: Outlet Width (int.)	60 (mm)
K: Outlet width (ext.)	76 (mm)
H: Outlet Height	64 (mm)
Weight	36 (Kgr)

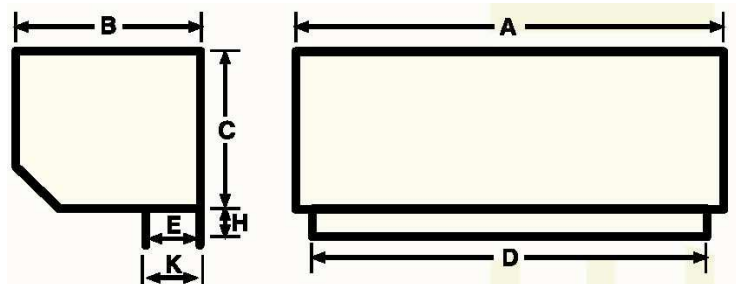

INDUSTRIAL TYPE - SIMPLE AIR CURTAINS
133 mm cross flow fan



OPERATIONAL CHOICES

A) Wired Remote Control Operation

Wall Mounted Wired Remote Control
(from 2.5m up to 6 m cable)
which additionally can be supplied
with an Infrared Remote Control as well



B) Infrared Remote Control Operation

Unit is provided with a build in Panel
(electronic) and an Infrared Remote Control .



**Both above described options
can be either delivered :**

- 1). Two speed operation (HI - LOW)
- 2). NL operation :
 - 15 different speeds
 - 1 up to 240 units in parallel connection
 - Master - Slave Operation
 - OLEFINI BMS monitoring

