

GENERAL TYPE – **ELECTRICALLY HEATED** AIR CURTAINS  
120 mm cross flow fan




# KEH - 34



**For use in :**

- **Department Stores**
- **Large Hotels**
- **Large Fast Foods**
- **Airports**
- **Bus Stations**

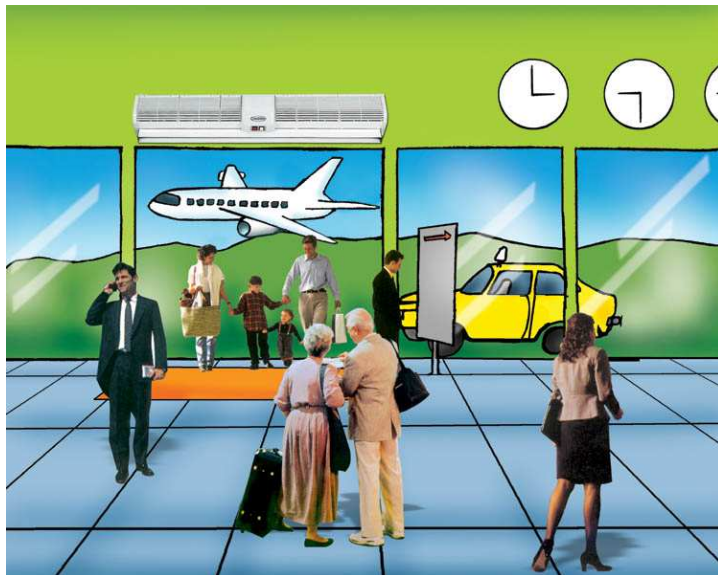

**GENERAL TYPE – ELECTRICALLY HEATED AIR CURTAINS**  
**120 mm cross flow fan**




Air Curtain KEH – 34 is capable of covering openings of 1.20 m long

### Technical Details


Max Door Height (m)	3.5
Max Door Width (m)	1.20
Outlet Velocity (m/sec)	12/10
Air Volume (m <sup>3</sup> /h)	2590/2160
Motor Power (W)	660
Capacitor (µF)	12
Motor Speed (rpm)	1380/1150
Power Supply	400V, 3N, 50Hz
Noise level in 1 m (dB)	65/62
Max CURRENT CONS	18 A/Phase (12KW) 22.5 A/Phase (15KW)
THERMAL POWER (KW)	12 or 15 KW
Toutlet-Tinlet (at 2 speeds)	16 <sup>0</sup> C/18 <sup>0</sup> C or 18 <sup>0</sup> C/20 <sup>0</sup> C

**AIR VELOCITY DISTRIBUTION CHART**

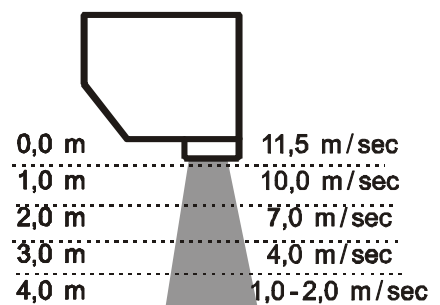

### Dimensions

A: Total Length	1249±2 (mm)
B: Total Width	227 (mm)
C: Height	205 (mm)
D: Outlet Length	1199 (mm)
E: Outlet Width (int.)	60 (mm)
K: Outlet width (ext.)	76 (mm)
H: Outlet Height	64 (mm)
Weight	31 (Kgr)

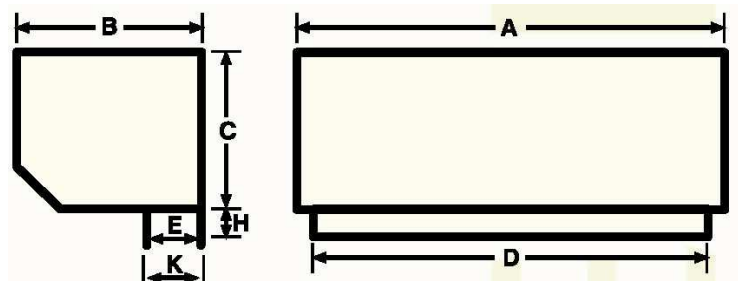

**GENERAL TYPE – ELECTRICALLY HEATED AIR CURTAINS**  
120 mm cross flow fan



## OPERATIONAL CHOICES

### A) Wired Remote Control Operation

Wall Mounted Wired Remote Control  
( from 2.5m up to 6 m cable)  
which additionally can be supplied  
with an Infrared Remote Control as well



### B) Infrared Remote Control Operation

Unit is provided with a build in Panel  
(electronic) and an infrared Remote Control.



**Both above described options  
can be either delivered :**

- 1). Two speed operation ( HI - LOW )
- 2). NL operation :
  - 15 different speeds
  - 1 up to 240 units in parallel connection
  - Master - Slave Operation
  - OLEFINI BMS monitoring

